



FCS SPRINKLER LOOP HANGER

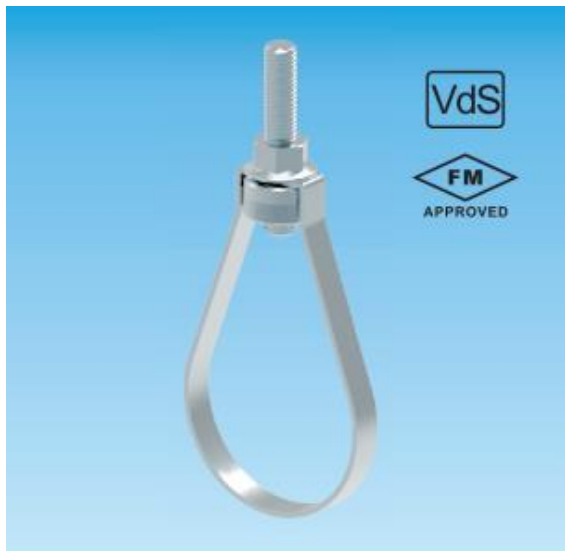

Advantage / Benefits

- For stationary fire protection in fixed water-based fire extinguishing systems – primarily in sprinkler system construction.
- Spray-water fire extinguishing systems
- CO2 fire extinguishing systems
- Halon fire extinguishing systems
- Foam fire extinguishing systems
- Power fire extinguishing systems

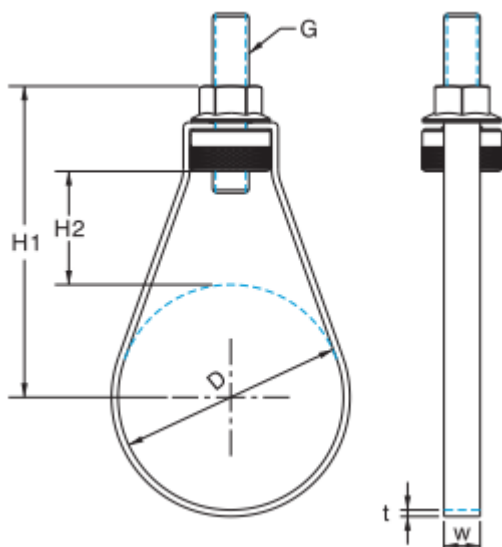

Technical Data

- **Material**
Steel 1.0332 acc. to DIN EN 10111
- **Zinc plating**
Electro zinc plated, $\geq 13\mu\text{m}$
- **Connection**
Flanged nut according to DIN1661

Loading Data	
Size	Max. Recommended Load (N)
3/4" - 2"	2.000
2-1/2" - 4"	3.500
5" - 6"	5.000
8"	6.500
10"	6.500

FCS SPRINKLER LOOP HANGER

Article Number	Clamping Range			Dimensions (mm)				VdS approved	FM approved	Weight kg/pcs	Pack Size (pcs)
	DN	D(mm)	(inch)	w x t	G	H1	H2				
15021025	25	33,7	1"	12x1,5	M8	56	18	x	-	0,0500	50
15021032	32	42,4	5/4"	12x1,5	M8	66	20	x	-	0,0500	50
15021040	40	48,3	6/4"	12x1,5	M8	71	22	x	-	0,0500	50
15021050	50	60,3	2"	12x1,5	M8	80	25	x	-	0,0500	50
15011025	25	33,7	1"	12x1,5	M10	63	16	x	x	0,0500	100
15011032	32	42,4	5/4"	12x1,5	M10	68	17	x	x	0,0500	100
15011040	40	48,3	6/4"	12x1,5	M10	73	19	x	x	0,0800	50
15011050	50	60,3	2"	12x1,5	M10	82	22	x	x	0,1000	50
15011065	65	76,1	2 1/2"	15x2,5	M10	99	30	x	x	0,1300	50
15011080	80	88,9	3"	15x2,5	M10	114	39	x	x	0,1400	25
15011100	100	114,3	4"	15x2,5	M10	144	56	x	x	0,2010	25
15011125	125	139,7	5"	15x2,5	M12	161	55	x	x	0,2000	25
15011150	150	168,3	6"	15x2,5	M12	189	68	x	x	0,3500	20
15011200	200	219,1	8"	25x2,5	M16	241	83	x	x	0,6000	10
15011250	250	273	10"	25x2,5	M20	338	142	x		0,8000	1