

TRAPEZOIDAL SHEET HANGER

Advantages/Benefits


- For the professional fastening element of installation to trapezoidal section sheet.
- Fastening by means of push-through mounting with M8 threaded rod.
- Also possible with Ø4.0mm AIMg 5 sealing rivets (DIN1725) or 4.2mm drilling screws of case-hardened steel.
- Approved by Vds (on request) for fastening pipes up to DN50.
- With or without noise insulation elements.

Technical Data

- **Material:**
Steel 1.0332 acc. to DIN EN 10111
- **Zinc plating:**
Electro zinc plated, 8-12 µm
- **Sound absorption unit:**
EPDM, black
- **Hardness:**
45° +/- 5° Shore-A
- **Temperature range:**
-50°C to +110°C

Note

- For mounting sprinkler systems, the use of sheet metal screws or steel blind rivets is **NOT** permitted.
- The maximum permissible load is also dependent on the trapezoidal sheet thickness.

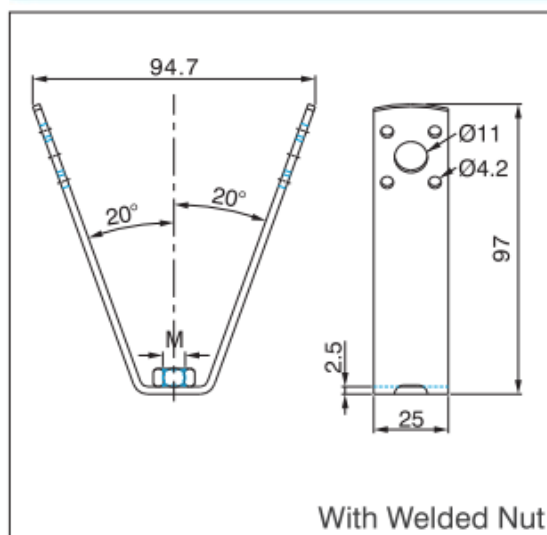

Article Number	Type	For Threaded Rod [mm]	VdS Approved	FM* Approved	Pack Size [pcs]	Max. Rec. Load [N]
13102003	With welded nut	M8	●	—	50	1300
13102002		M10	●	●	50	1300