


Toggle Clamp

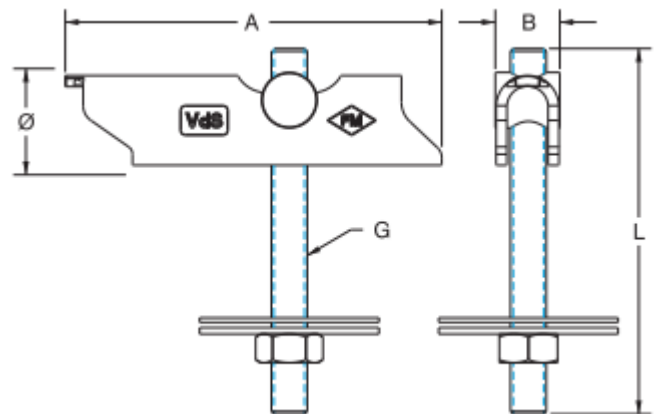

Advantage / Benefits

- **For fixing pipes up to a nominal diameter of DN50 directly to ceilings made of trapezoidal sheet according to VdS/FM standards of as single point mounting solution**
- In cases where VdS or FM regulations are not applicable or in cases of ventilation systems, larger loads may be fixed via crossbars and by an appropriate number of toggle plugs
- By turning the threaded rod, it is possible to make height adjustments
- This threaded rod is secured and cannot be unscrewed completely
- The Hypalon washer is weather-resistant and thus a crucial safety factor when sealing the mounting bore

Technical Data

- **Material**
Steel 1.0332 acc. To DIN EN 10111
- **Zinc plating**
Electro zinc plated, $\geq 13 \mu\text{m}$
- **Fastening bolt**
Hexagonal bolt DIN933.8.8, bolt end with cup point acc. To EN ISO 4753 and lock nut

NOTE

- Permissible carrying capacity of the trapezoidal sheet has to be considered
- *Type M10 for sprinkler systems approved by FM are on the request

Toggle Clamp

Article Number	Grub Screw G (mm)	Length of grub screw L (mm)	Fitting bore \varnothing (mm)	Dimensions (mm)		Approvals		Max. Rec. Load (N)	Weight kg/pcs	Pack Size (pcs)
				A	B	VdS	*FM			
15006108	M8	100	22	84	14	X	-	800	0,1100	25
15006100	M10	100	25	84	16	X	X	800	0,1400	25
15006200	M10	200	25	84	16	X	X	800	0,1800	25

