

## Beam Clamp



### Advantages / Benefits


- For fixing pipe works, air ducts and sprinkler systems to steel girders
- Fastening on steel girder without welding and drilling
- The simplest, quickest and most cost-effective method of suspending building services from steel beams
- High load-bearing capacity due to smart design of reinforcement rib
- Suitable for use with parallel or tapered flange beams
- Level adjustment is also possible later with through-hole
- No slipping of the clamp from steel girder

### Technical Data

- **Material**  
Malleable cast iron EN-GJMB-350-10 acc. To DIN 1562
- **Zinc plating**  
Electro zinc plated, 8-12µm
- **Fastening bolt**  
Hexagonal bolt DIN 933.8.8, bolt end with cup point acc. To EN ISO 4753 and lock nut

### NOTE

- Beam clamps can generally be secured by safety strips, safety steel strip must be fitted according to VdS certification, when fastening pipe greater than DN65

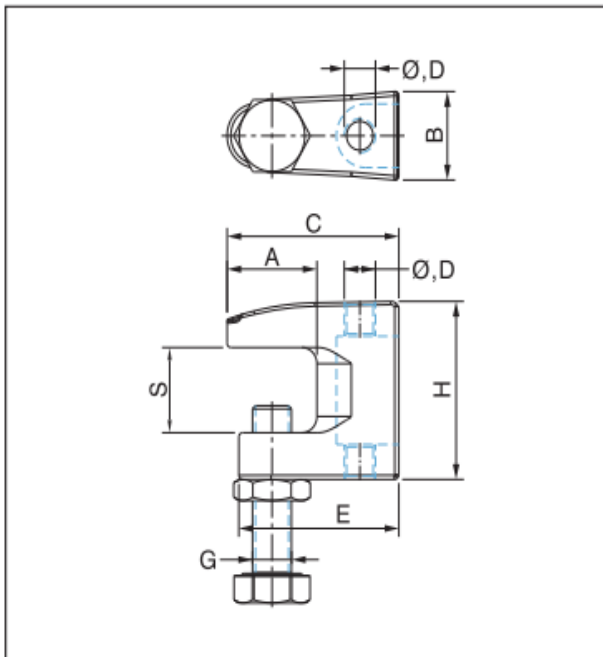

## Beam Clamp

Loading Data	
For Type	Max. Recommended Load (N)
PHK8	1200
PHK10	2500
PH12	3500
PH16	5000

Article Number	Type	Clamping Range S (mm)	Size of Clearance		Set Screw G	Dimensions (mm)					Approvals		Weight kg/pcs	Pack Size (pcs)
			Hole ø (mm)	Tread D (mm)		A	B	C	E	H	Vds	FM		
15007008	PHK8	0-18	-	M8	M8	21	19	38	35	35	X	-	0,0860	50
15007009	PHK8	0-18	9	-	M8	21	19	38	35	35	X	-	0,8060	50
15007010	PHK10	0-20	-	M10	M10	23	21	44	41	42	X	X	0,1500	50
15007011	PHK10	0-20	11	-	M10	23	21	44	41	42	X	X	0,1500	50
15007012	PH12	0-26	-	M12	M10	35	24	58	48	54	X	X	0,1900	50
15007013	PH12	0-26	13	-	M10	35	24	58	48	54	X	X	0,1900	50
15007016	PH16	0-26	-	M16	M12	30	30	58	55	58	X	X	0,3200	50
15007017	PH16	0-26	17	-	M12	30	30	58	55	58	X	X	0,3200	50